

**Everlux LLL**  
**Aluminium floor strips****1. Product**

Ⓢ **Everlux®-LLL** Aluminium floor strips

**2. Product Description**

Aluminium floor profile with non-slip self-adhesive polycarbonate Ⓢ **Everlux®-LLL** with 0.62mm thickness.

Aluminium floor profile Ⓢ **Everlux®-LLL** which has been specifically designed to be laid on uneven floor surfaces so that escape route boundaries can clearly identified in an emergency situation and/or in the event of power failure. The low-profile strips are supplied with an anti-slip photoluminescent polycarbonate top surface with the aluminium profile edges consisting of fine blades along their full length which enhance the floor strip's anti-slip properties even in the event of oil or lubricant spillage.

The Aluminium floor strips Ⓢ **Everlux®-LLL** are supplied ready cut to your specific requirements up to a maximum length of 2.5m and are supplied with a high-tack adhesive which allows easy installation on clean, dust and grease free floor surfaces.

**3. Photoluminescent Properties**

Ⓢ **Everlux®-LLL** products fully conform to the International Norms ISO 16069 and IMO A.752 (18) Resolution.

When stimulated with an ambient light emitting 25 lux for 15 minutes the photoluminescent characteristics are as follows:

Time after removing the exciting light (in minutes)	Luminescent intensity (mcd/sqm)
10 minutes	80 <sup>1</sup>
60 minutes	10 <sup>1</sup>
Luminescent intensity 100 times greater than the limit of human visibility	Period of light decay (minutes)
0.3 mcd/m <sup>2</sup>	1000 <sup>1</sup>

- When stimulated with ambient light of only 1000 lux during 5 minutes, the photoluminescent characteristics are as follows:

Time after removing the exciting light (in minutes)	Luminescent intensity (mcd/m <sup>2</sup> )
10 minutes	150 <sup>1</sup>
60 minutes	21 <sup>1</sup>
Luminescent intensity 100 times greater than the limit of human visibility	Period of light decay (minutes)
0.3 mcd/m <sup>2</sup>	2000 <sup>1</sup>

<sup>1</sup> The luminescent intensity of the non-slip self-adhesive strips on the floor may be lower due to the protective layer of the polycarbonate.


### Everlux LLL Aluminium floor strips

#### 4. Abrasion and anti-slip properties

Please, consider the technical data sheet for the Everlux-LLL products.

#### 5. Dimensions and Colours

**Base material:** grey (aluminium on its natural colour)

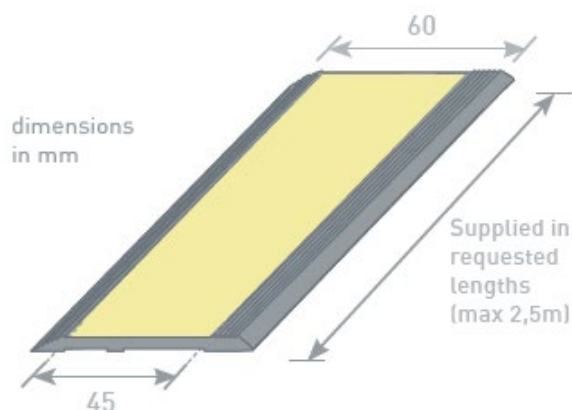

#### 6. Positioning and Mounting

The installation of the product must follow the following indications:

##### Preparation of the application surface:

All surfaces on which signs are to be installed shall be considered as contaminated.

**Cleaning and Degreasing** - For this operation a degreasing solution must be used; for example, isopropyl alcohol in the proportion 70% isopropyl alcohol and 30% water.

The cleaning operation must be done in two phases:

- Start by applying the degreasing solution to the surface and clean the whole surface in circular movements with a paper or cloth that does not leave residues, to remove dirt and grease;
- Proceed by applying a second dosage of the degreasing solution to the surface and, this time, cleaning it with movements in only one direction.

**Drying** - Let it dry, waiting 2 to 3 minutes until all cleaning solution evaporates. Do not touch the previously cleaned and degreased surfaces with your fingers.

**Primary application** - Apply a thin, uniform coating to the bonding surface. Use the minimum amount that will fully coat the area to be taped.

Application may be done with a clean lint-free cloth, pad, felt tipped dauber, absorbent paper towel or disposable tissue. Brushes, rollers, or spraying tend to apply excessive amounts should therefore be avoided.

### Everlux LLL Aluminium floor strips

Allow to dry completely prior to application of adhesive safety sign. Depending on temperature and humidity, the drying and reacting time of adhesion promoter can vary. Typical drying time will be 1-2 minutes.

Apply the adhesive safety sign within 8 hours or reapply adhesion promoter.

We suggest the usage of 3M™ Adhesion Promoter 111.

#### Product application

**Removal of the protective paper from the sign adhesive** - Remove the adhesive backing paper in one corner of the product without touching the adhesive.

**Application of the product** - Apply the sign in the previously prepared place, avoiding the formation of bubbles and exerting pressure throughout the sign area. It is recommended to use a roller for better distribution of forces throughout the surface.

The quality of the adhesion will depend on the amount of contact between the adhesive and the installation surface. A strong, homogenous pressure promotes union.

The application should be made at the room temperature between 15°C and 25°C, and never be less than 15°C.

Once applied, at the recommended application temperature, possible temperature changes are generally well tolerated by the glue, without modifying the adhesion properties of the glue.

**Adhesion time** - Until adhesion is considered complete, some time is required: approximately 50% final adhesion is obtained after 20 minutes, 90% after 24 hours and 100% after 72 hours (at room temperature).

**Caution - before installation it is essential that the installer evaluate the surface where the signs are to be installed:**

**Rough or porous surfaces** - A rough or porous surface will not allow the application of self-adhesive elements and may require other installation type.

**Parallelism of the surface to be installed** - Surface parallelism is essential to adhesion quality. On surfaces where there is no complete parallelism, the need for alternative installation solutions such as mastic glue or structural glue, or bolting to support structures or directly to the surface, must be considered.

**Curved Surfaces** - Self-adhesive products are ideal for flat surfaces. Although the application on curved surfaces is possible, it must be verified in each case whether the tension created by the curvature of the surface does not exceed the adhesiveness of the product.

**Special surfaces** - Some surfaces have special characteristics such as the presence of coatings that impart specific characteristics to the surfaces. This type of surface usually has a low surface energy and may require special preparation. It is the responsibility of the installer to evaluate the surface and, if necessary, to ask the manufacturer for instructions on the correct preparation of the surface.

For further information please consult the Everlux Installation Guide for self-adhesive products:



## 7. Cleaning

The products do not require any particular attention and can be cleaned using either with a dry or damp clean cloth. Do not use detergent products.

## 8. Guarantee

Under suitable conditions of application and in indoor environment and proper cleaning, a guarantee of 3 years is provided against defects of manufacture.

Exposure to the following conditions may affect the durability of the product:

### Everlux LLL Aluminium floor strips

- Submersion or jets of water, as well as humid environments and leaks may reduce the strength of the product and as such the warranty period.
- For outdoor applications, considering the possibility of exposure to temperature and other extreme environments, this period may be shortened.

The adhesive used in the floor profiles is composed of a double-sided polyethylene foam impregnated with an adhesive that allows immediate fixing.

For a longer product life, consideration should be given to the type and state of the application surface, the type of movement to be subjected and the methods of cleaning. Refer to point 6 of this data sheet.

## 9. Health and safety

The product does not contain any radioactive substances and in terms of toxicity the product is considered safe according to the European Norm EN 71-3.

## 10. Quality and Certification

Ⓡ **Everlux®-LLL** products have Lloyd's Register Type Approval Certification.

The quality of Ⓡ **Everlux®-LLL** products is ensured and maintained by means of a rigorous process of quality control using testing measures conducted in our own laboratory whilst observing all applicable Norms and Standards;

## 11. Legislation and Normative references

All of our signs Ⓡ **Everlux®-LLL** fully conform to the following Norms:

- BS ISO 16069
- BS 5499-4
- BS EN ISO 7010
- Norms BS ISO 3864
- IMO Resolution A.752 [18]
- DIN 67510-1